


201 N Columbia Blvd
Portland, OR 97217
PH 503-548-4521
FAX 503-283-6770
1-800-651-1989
www.wsbindustries.com



*Worldwide
Sustainable Blends
Solutions for a better tomorrow!*

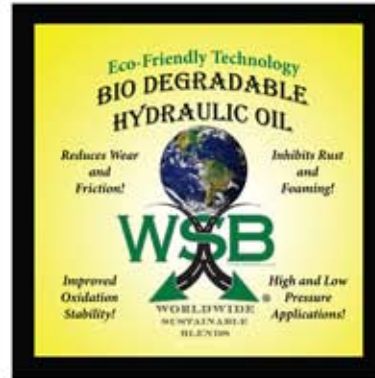

Bio-Degradable Hydraulic Fluid

Anti-Wear Hydraulic Oils - ISO32, ISO46, ISO68 Grades

Description:

WSB ISO32.46.68 (Biodegradable Hydraulic Fluid) is fully formulated, thermally stable, non-zinc containing anti-wear hydraulic oil for use in both high and low pressure hydraulic systems for industrial and mobile applications. It contains a unique combination of metal passivator, demulsifiers, rust inhibitor and defoamer for longer fluid life. ISO 32.46.68 was developed as an alternative to mineral based hydraulic fluids where good low temperature properties, improved oxidation stability, low toxicity and fluid biodegradation properties are required.

BENEFITS:

- Superior hydrolytic stability
 - Excellent EP performance
 - Outstanding oxidative stability
 - Excellent rust protection
 - Good demulsibility and anti-foam properties
 - No heavy metals
 - Good low temperature properties
- Excellent anti-wear performance
Biodegradable via CEC/Strum test method

APPLICATIONS:

Manufacturing • Transportation • Marine • Agriculture • Construction

PERFORMANCE TESTING:

- ASTM D943, ASTM D2619, ASTM D892, ASTM D665, ASTM D1401, ASTM D130
- PERFORMANCE REQUIREMENTS
- Vickers I-286-S, 2950-S • Cincinnati Milacron P-68, P-69, P-70
- DIN 51524 Part 2 • Racine, Variable Volume Vane Pumps
- AFNOR NFE 48-603HM • Lee-Norse 100-1 • Jeffrey No 87
- Ford M6C32 • BF Goodrich 0152 • General Motors LH-04-1, LH-06-1, LH-15-1

MIX RATIO

Per manufacturers specifications

